
TECHNICAL DATASHEET

LBF400, LAB BASIC FREEZER -25°/-10° C										
MODELS	VOLUME (Lt)	INNER DIMENSIONS (mm)		OUTER DIMENSIONS (mm)			SHIPPING DIMENSION (mm)			
		W	D	Н	W	D	Н	W	D	Н
LBF400	378 L	500	510	1500	600	700	1900	700	800	2000

CAPACITY	378 L
TEMPERATURE RANGE	-25° / -10° C
AMBIENT TEMPERATURE	MAX 32°C
POWER	230 V - 50 HZ, 2,5 AMP
ENERGY CONSUMPTION	2,8 KwH/24 Hrs
WEIGHT / SHIPPING WEIGHT	80 kg / 102 kg
MAX. SHELF LOAD	20 kg Per Shelf
COOLING TECHNOLOGY	Static Cooling
INTERFACE	Voltage Free contact for remote alarm



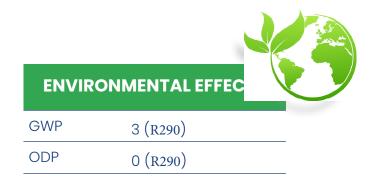

We reserve the right to change specifications without notice. Subject to confirmation, availability and errors.





TECHNICAL DATASHEET

CONSTRUCTION		
$\sqrt{\text{Interior powder coated aluminium}}$	√ Isolation 50 mm	√ Key Lock
$\sqrt{1 \text{ pcs of port hole (20mm diameter)}}$	√4 castors	√6 pcs shelves
√ Light	Exterior powder coated steel	
√ Refrigerant R290	√ Cyclopentane foam	

ALARMS						
$\sqrt{\text{Visual/Acoustic alarms}}$	√ Open Door Alarm	$\sqrt{\text{Voltage Free Contact For Remote Alarm}}$				
√ Power Failure Alarm	√ Probe Failure Alarm	√ Low Battery Alarm				
√ Adjustable High/Low Temperature alarms	Battery back up for logging an	nd alarms				

DISPLAY			
√ Digital Controller	$\sqrt{\mathrm{Datalogger}}$	$\sqrt{\text{USB}}$ for download	

We reserve the right to change specifications without notice. Subject to confirmation, availability and errors.



